



DRL-2005 E QUAD CONTROL MODULE SYSTEM LAYOUT AND WIRING DIAGRAM:
FOR SWAPING WHITE DRL TYPES FOR AMBER TURN DRLS:
FOR DUAL FILAMENT SIGNAL BULBS

15 AMP FUSE ATC TYPE

MAIN STATUS LED
 BICOLOR LED
 GREEN=ON, RED=OFF
 NO ILLUMINATION = IGN KEY 'OFF'

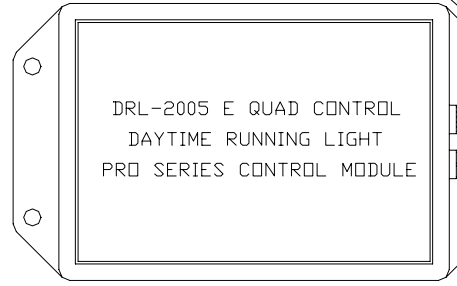

OPTIONAL:
 FOR EXPANSION:
 NO CONNECTIONS FOR CONFIGURATION SHOWN



IMPORTANT:
 MUST CUT WHITE LOOP FOR DRL SWAP FUNCTION

**NOTE: IF VEHICLE HID EQUIPPED, SYSTEM MUST CONNECT TO WIRE SUPPLYING HID BALLAST
 NEVER CONNECT SYSTEM DIRECTLY TO HID BULB!

